

L70 B3 / 20.000H
L & B LED Value
(Lumen Maintenance/Depreciation & Failure)




20.000H
Long Lifespan



SMD
LED Chip Type



SDCM <7
Standard Deviation of Color Matching

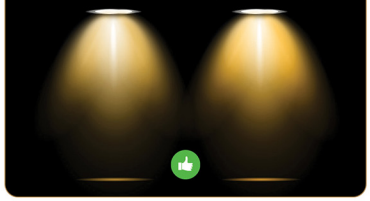

>80
High CRI

IP65
IP Rating

180pcs/m
LED Qty/Meter

AC 220-240 V
Input Voltage

50/60 Hz
Frequency


FPCB + PVC
Material


Shopping mall


Corridor Mall


Restaurant


Cafe


Apartment


Facade

Strip LED AC **LS02R**

Optima - 2 Years Warranty

Hannochs Prestige

Indoor/Outdoor Lighting


1


2

	Item No.	Wattage	Luminous Flux (lm)	Efficiency (lm/W)	Beam Angle/ Lens degree	Dimmable	Color Temp.	CRI	Product Dimension	PCB Width	Length/ Roll	Flicker Free
1	StripLED AC LS02R Optima 1200lm/M 830 (50M): 2Pc *Hannochs Power Cord AC Optima (50M) 1Pack *Accessories	12W	50.000 lm/50m ±10%	100	120°		3000K	>80	16*6.5mm	10mm	50m	No
1	StripLED AC LS02R Optima 1200lm/M 840 (50M): 2Pc *Hannochs Power Cord AC Optima (50M) 1Pack *Accessories	12W	50.000 lm/50m ±10%	100	120°		4000K	>80	16*6.5mm	10mm	50m	No
1	StripLED AC LS02R Optima 1200lm/M 865 (50M): 2Pc *Hannochs Power Cord AC Optima (50M) 1Pack *Accessories	12W	50.000 lm/50m ±10%	100	120°		6500K	>80	16*6.5mm	10mm	50m	No
2	StripLED AC LS02R Optima 1200lm/M 830	12W	1200 lm/M	100	120°		3000K	>80	16*6.5mm	10mm	50m	No
2	StripLED AC LS02R Optima 1200lm/M 840	12W	1200 lm/M	100	120°		4000K	>80	16*6.5mm	10mm	50m	No
2	StripLED AC LS02R Optima 1200lm/M 865	12W	1200 lm/M	100	120°		6500K	>80	16*6.5mm	10mm	50m	No

Item / Product

Ready Pre Order

Yes (Support Dimmable)

No (Support Dimmable)